

Ref. : VOC4251-00.pas

Rev. : Initial

Date : 08/10/2008

Page : 1/1

RESILIENT SEAT GATE VALVE PN25 SHORT PATTERN

VOC 4251-00



Tecofi
FAREX FLUID SOLUTION DESIGNER

APPLICATION

General use : Water supply, fire protection, irrigation, water treatment

GENERAL CHARACTERISTICS

- Design in accordance to standard NF EN 1171.
- Range : from DN 40 to DN 400 in standard, contact us for other dimensions.
- Non rising stem.
- Clockwise to close or anti clockwise to close.
- No zones of retention.
- Low head losses.
- Bonnet with easy adaptation for actuator.
- Protection with paraffin on bolts.

CONSTRUCTION

15	4	Screw caps	Paraffin	
14	4	Screw	Stainless steel	
13	1	Bottom shield	EPDM	
12	2	O-ring stem	EPDM	
11	1	Seal o-ring	EPDM	
10	1	Bonnet gasket	EPDM	
9	1	Top cork	Brass	
8	1	Splindle washer	Nylon	
7	1	Splindle nut	Brass	
6	1	Wedge seat	Brass	
5	1	Stem	Stainless steel 416	
4	1	Handwheel	Ductile iron EN-GJS-400-15	DIN : GGG 40 ASTM : A536 65-45-12 BS : EN 1563 EN-JS 1030
3	1	Wedge	Ductile iron EN-GJS-400-15	DIN : GGG 40 ASTM : A536 65-45-12 BS : EN 1563 EN-JS 1030
2	1	Bonnet	Ductile iron EN-GJS-400-15	DIN : GGG 40 ASTM : A536 65-45-12 BS : EN 1563 EN-JS 1030
1	1	Body	Ductile iron EN-GJS-400-15	DIN : GGG 40 ASTM : A536 65-45-12 BS : EN 1563 EN-JS 1030
Pos.	Qty.	Description	Material	

DIMENSIONS




DN	L	H	Ø V	Ø D	Ø K	n x Ø d	Ø d1	S1	S2	h1	Weight (kg)
mm	inch										
40	1" 1/2	140	254	200	150	110	4 x Ø18	20	14,0	17,0	12,3
50	2"	150	265	200	165	125	4 x Ø18	20	14,0	17,0	13,3
65	2" 1/2	170	305	240	185	145	8 x Ø18	24	17,3	20,5	17,5
80	3"	180	345	240	200	160	8 x Ø18	24	17,3	20,5	21,0
100	4"	190	366	280	235	190	8 x Ø23	26	19,3	23,0	29,2
125	5"	200	405	320	270	220	8 x Ø27	26	19,5	23,0	37,5
150	6"	210	461	320	300	250	8 x Ø27	32	19,0	23,0	48,2
200	8"	230	536	360	360	310	12x Ø27	32	24,0	28,5	73,6
250	10"	250	643	450	425	370	12 x Ø30	36	27,5	31,5	104,5
300	12"	270	718	500	485	430	16 x Ø33	36	27,5	31,5	135,3
350	14"	290	805	500	555	490	16 x Ø33	36	27,5	31,5	185,5
400	16"	310	877	600	620	550	16 x Ø36	36	27,5	31,5	299,1

WORKING CONDITIONS

Maximum working pressure : 25 bar.
Maximum temperature : -10°C / +130°C.

STANDARDS

Test procedures are established according to standard NF EN 12266-1, NF EN 12266-2, DIN 3230, ISO 5208.
Face to face according to standard EN 558-1 serie 14 and DIN 3202 / F4 (short pattern).
Connections according to standard EN 1092-2 ISO PN 25.

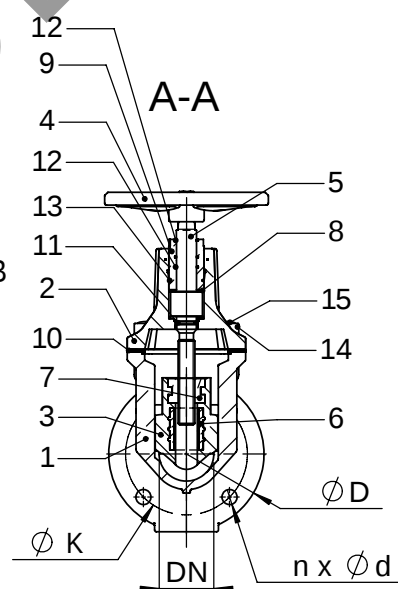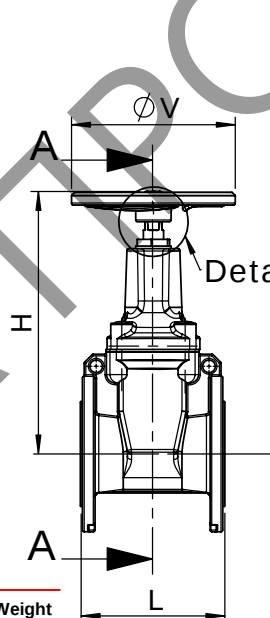

Detail B (Stem) :
Mounting interface